

SEC. 10-2.770 - REQUIRED PARKING SPACES FOR PERSONS WITH PHYSICAL DISABILITIES IN MEDICAL CARE FACILITIES.

At facilities providing medical care and other services for persons with mobility impairments, the minimum required number of accessible parking spaces for persons with physical disabilities shall be:


- a. Outpatient units and facilities: 10 percent of the total number of parking spaces provided serving each such outpatient unit or facility.
- b. Units and facilities that specialize in treatment or services for persons with mobility impairments: 20 percent of the total number of parking spaces provided serving each such unit or facility.

**APPENDIX A-1. OFF STREET PARKING REGULATIONS
MINIMUM STALL AND AISLE DIMENSIONS ⁽¹⁾**

	ANGLE DEGREES	STALL WIDTH L	STALL DEPTH D	AISLE WIDTH ⁽²⁾ A	OVER ALL P	PH
STANDARD CAR	0	23.0	8.0	12.0	28	—
	30	18.0	16.0	12.0	44	37
	45	12.7	18.5	12.0	49	43
	60	10.4	20.0	17.0	57	53
	75	9.3	19.0	23.0	61	59
	90	9.0	19.0	26.0	64	—
		9.5	19.0	25.0	63	—
		10.0	19.0	24.0	62	—
		10.5	19.0	22.0	60	—
	COMPACT CAR	45	11.3	15.6	12.0	43.2
60		9.2	17.0	14.5	48.5	45
75		8.3	16.86	17.5	50.6	50


	90	8.0	15.0	20.0	50.0	—
--	----	-----	------	------	------	---

- (1) Alternate designs for angled parking may be used if approved by the Planning Director.
- (2) If the parking angle is less than 90°, parking aisle shall be designed for one-way circulation.

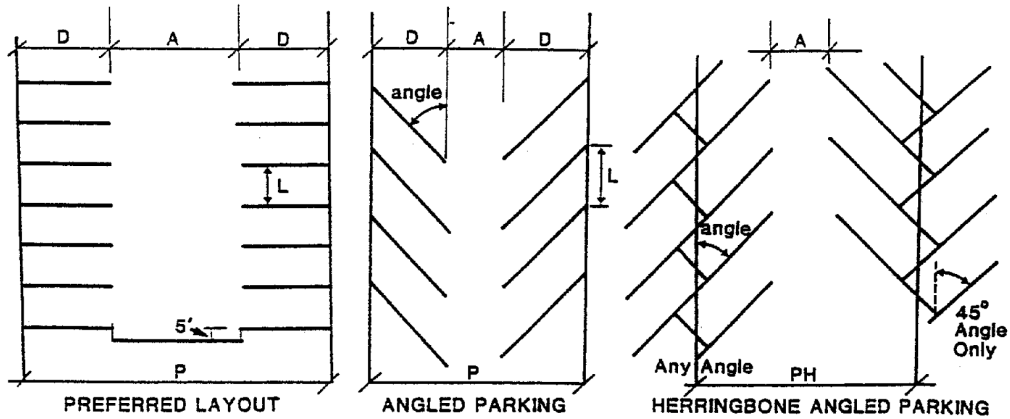

APPENDIX A-2. DRIVEWAY AND DESIGN REQUIREMENTS

1. All covered parking spaces shall have a minimum clearance (height) of 6 feet, 6 inches for residential uses and 7 feet, 0 inches for commercial and industrial uses.
2. In order to prevent backing over sidewalks, backing into streets and congestion at lot entrances, no stall may be located within 10 feet of the property line adjacent to the street.
3. In single-entrance, 90° parking lots, provisions for adequate egress from rear stalls shall be made.

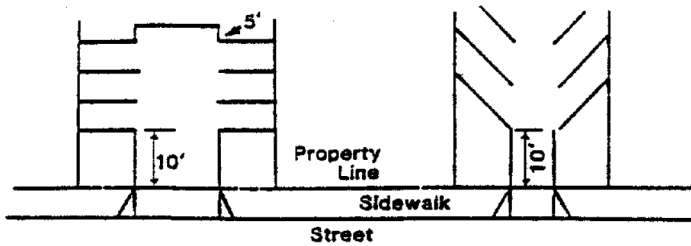

4. Two-way aisles shall have a minimum width of 20 feet.
5. Driveway openings shall be aligned with parking lot aisles.
6. Parking lot designs shall be drawn to scale with dimensions and parking angle indicated.
7. For 90° parking, 2 feet of the stall depth may be used for compact vehicle overhang; 2½ feet of stall depth may be used for standard-sized vehicle overhang.
8. Off-street loading spaces or docks in industrial districts shall be located behind the public right-of-way, a distance no less than the maximum length vehicle permitted on streets and highways by the State of California.

9. Parking spaces for the handicapped shall be 17 feet wide with an 8 foot wide loading area adjacent to the passenger side of the vehicle for one space and 26 feet wide for 2 spaces sharing an 8 foot wide loading area.
10. The minimum driveway widths shown below shall apply to all access driveways irrespective of the total length of the driveway or the number of parking bays or parking areas served by the driveway.

Number of Stalls Served	One-Way Driveway	Two-Way Driveway
1 through 7	10 feet*	12 feet**
8 or more	12 feet	20 feet

* A driveway serving one single-family residence shall be a minimum of 10 feet, except where the house is located more than 150' from public right-of-way, the Fire Department may require 12' driveway width.

** Where the distance between parking bays or areas exceeds 40 feet or visibility between parking bays or areas is impaired, the driveway width shall be 20 feet. (See illustration below.)

